



CY54/74FCT163T

4-Bit Binary Counter

Features

- Function, pinout, and drive compatible with FCT and F logic
- FCT-C speed at 5.8 ns max. (Com'l)
FCT-A speed at 7.2 ns max. (Com'l)
- Reduced V_{OH} (typically = 3.3V) versus of equivalent FCT functions
- Edge-rate control circuitry for significantly improved noise characteristics
- Power-off disable feature
- ESD > 2000V


- Matched rise and fall times
- Fully compatible with TTL input and output logic levels
- Sink current 64 mA (Com'l),
32 mA (Mil)
- Source current 32 mA (Com'l),
12 mA (Mil)

Functional Description

The FCT163T is a high-speed synchronous modulo-16 binary counter. It is synchronously presettable for

application in programmable dividers and has two types of count enable inputs plus a terminal count output for versatility in forming synchronous multi-staged counters. The FCT163T has a Synchronous Reset input that overrides counting and parallel loading and allows the outputs to be simultaneously reset on the rising edge of the clock.

The outputs are designed with a power-off disable feature to allow for live insertion of boards.

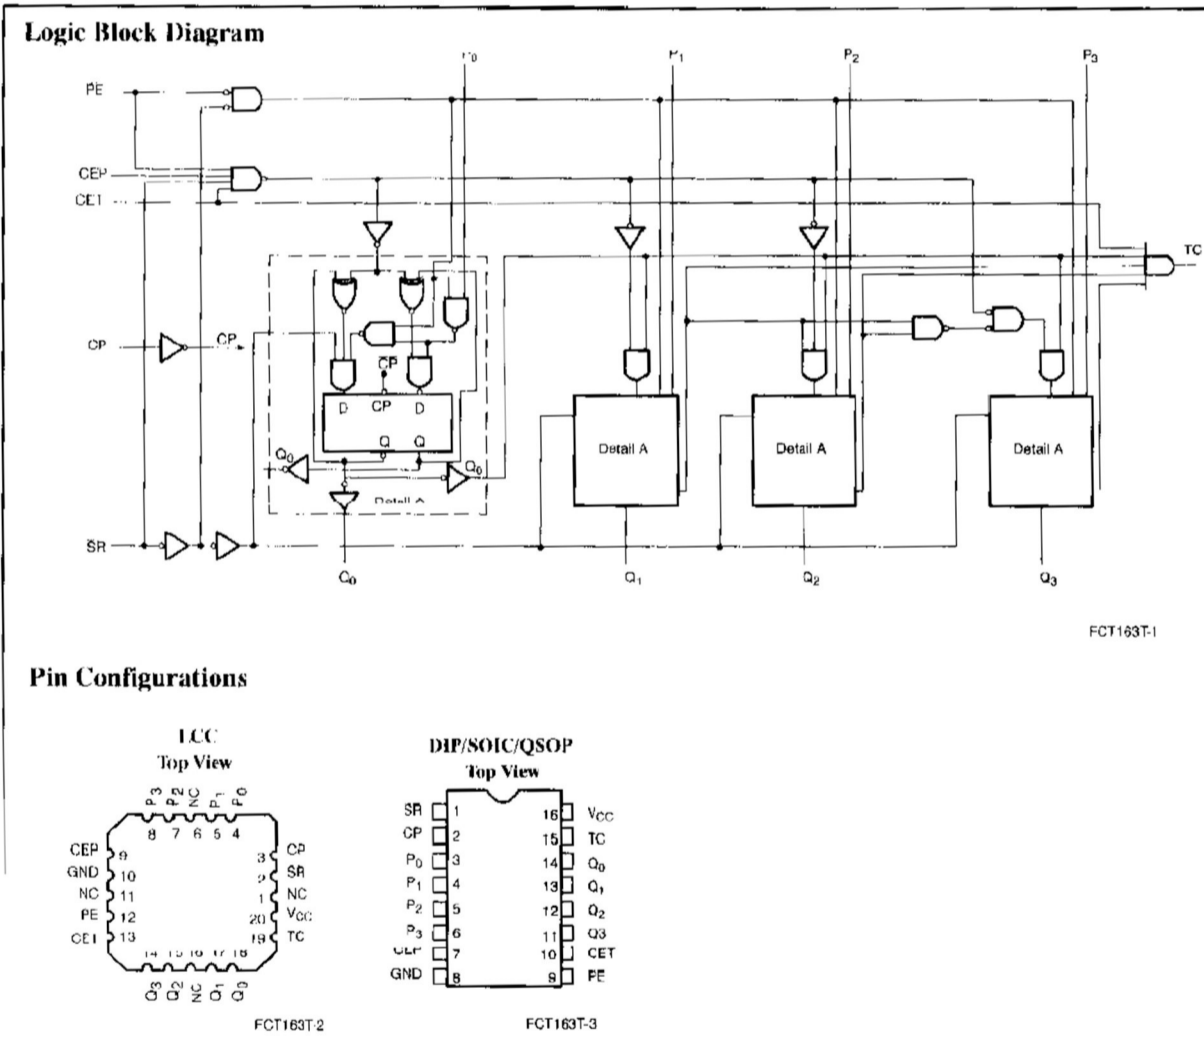



Function Table^[1]

Inputs				Action on the Rising Clock Edge(s)
SR	PE	CET	CEP	
L	X	X	X	Reset (Clear)
H	L	X	X	Load ($P_n \rightarrow Q_n$)
H	H	H	H	Count (Incremental)
H	H	L	X	No Charge (Hold)
H	H	X	L	No Charge (Hold)

Pin Description

Name	Description
CEP	Count Enable Parallel Input
CET	Count Enable Trickle Input
CP	Clock Pulse Input (Active Rising Edge)
SR	Synchronous Reset Input (Active LOW)
P	Parallel Data Inputs
PE	Parallel Enable Input (Active LOW)
Q	Flip-Flop Outputs
TC	Terminal Count Output

Maximum Ratings^[2,3]

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature	-65°C to +150°C
Ambient Temperature with Power Applied	-65°C to +135°C
Supply Voltage to Ground Potential	-0.5V to +7.0V
DC Input Voltage	-0.5V to +7.0V
DC Output Voltage	-0.5V to +7.0V
DC Output Current (Maximum Sink Current/ I_{OL})	120 mA
Power Dissipation	0.5W

Static Discharge Voltage >2001V (per MIL-STD-883, Method 3015)

Operating Range

Range	Range	Ambient Temperature	V _{CC}
Commercial	CT	0°C to +70°C	5V ± 5%
Commercial	T, AT	-40°C to +85°C	5V ± 5%
Military ^[4]	All	-55°C to +125°C	5V ± 10%

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions	Min.	Typ. ^[5]	Max.	Unit	
V _{OHI}	Output HIGH Voltage	V _{CC} = Min., I _{OHI} = -32 mA	Com'l	2.0		V	
		V _{CC} = Min., I _{OHI} = -15 mA	Com'l	2.4	3.3	V	
		V _{CC} = Min., I _{OHI} = -12 mA	Mil	2.4	3.3	V	
V _{OL}	Output LOW Voltage	V _{CC} = Min., I _{OL} = 64 mA	Com'l		0.3	0.55	V
		V _{CC} = Min., I _{OL} = 32 mA	Mil		0.3	0.55	V
V _{HI}	Input HIGH Voltage		2.0			V	
V _{LI}	Input LOW Voltage				0.8	V	
V _H	Hysteresis ^[6]	All inputs		0.2		V	
V _{IK}	Input Clamp Diode Voltage	V _{CC} = Min., I _{IN} = -18 mA		-0.7	-1.2	V	
I _I	Input HIGH Current	V _{CC} = Max., V _{IN} = V _{CC}			5	μA	
I _{HI}	Input HIGH Current	V _{CC} = Max., V _{IN} = 2.7V			±1	μA	
I _{LI}	Input LOW Current	V _{CC} = Max., V _{IN} = 0.5V			±1	μA	
I _{OS}	Output Short Circuit Current ^[7]	V _{CC} = Max., V _{OUT} = 0.0V	-60	-120	-225	mA	
I _{OFF}	Power-Off Disable	V _{CC} = 0V, V _{OUT} = 4.5V			±1	μA	

Notes:

1. H = HIGH Voltage Level, L = LOW Voltage Level, X = Don't Care.
2. Unless otherwise noted, these limits are over the operating free-air temperature range.
3. Unused inputs must always be connected to an appropriate logic voltage level, preferably either V_{CC} or ground.
4. T_A is the "instant on" case temperature.
5. Typical values are at V_{CC} = 5.0V, T_A = +25°C ambient.
6. This parameter is guaranteed but not tested.
7. Not more than one output should be shorted at a time. Duration of short should not exceed one second. The use of high-speed test apparatus and/or sample and hold techniques are preferable in order to minimize internal chip heating and more accurately reflect operational values. Otherwise prolonged shorting of a high output may raise the chip temperature well above normal and thereby cause invalid readings in other parametric tests. In any sequence of parameter tests, I_{OS} tests should be performed last.



Capacitance^[6]

Parameter	Description	Typ. ^[5]	Max.	Unit
C _{IN}	Input Capacitance	5	10	pf
C _{OUT}	Output Capacitance	9	12	pF

Power Supply Characteristics

Parameter	Description	Test Conditions	Typ. ^[5]	Max.	Unit
I _{CC}	Quiescent Power Supply Current	V _{CC} =Max., V _{IN} ≤ 0.2V, V _{IN} ≥ V _{CC} -0.2V	0.1	0.2	mA
ΔI _{CC}	Quiescent Power Supply Current (TTL inputs HIGH)	V _{CC} =Max., V _{IN} =3.4V ^[8] f ₁ =0, Outputs Open	0.2	2.0	mA
I _{CCD}	Dynamic Power Supply Current ^[9]	V _{CC} =Max., One Bit Toggling, Load Mode, 50% Duty Cycle, Outputs Open, CEP=CET=PE=GND, SR=V _{CC} , V _{IN} ≤ 0.2V or V _{IN} ≥ V _{CC} -0.2V	0.06	0.12	mA/MHz
I _C	Total Power Supply Current ^[10]	V _{CC} =Max., f ₀ =10 MHz, Load Mode, 50% Duty Cycle, Outputs Open, One Bit Toggling at f ₁ =5 MHz, CEP=CET=PE=GND, SR=V _{CC} , V _{IN} ≤ 0.2V or V _{IN} ≥ V _{CC} -0.2V	0.7	1.4	mA
		V _{CC} =Max., f ₀ =10 MHz, Load Mode, 50% Duty Cycle, Outputs Open, One Bit Toggling at f ₁ =5 MHz, CEP=CET=PE=GND, SR=V _{CC} , V _{IN} =3.4V or V _{IN} =GND	1.2	3.4	mA
		V _{CC} =Max., f ₀ =10 MHz, Load Mode, 50% Duty Cycle, Outputs Open, Four Bits Toggling at f ₁ =5 MHz, CEP=CET=PE=GND, SR=V _{CC} , V _{IN} ≤ 0.2V or V _{IN} ≥ V _{CC} -0.2V	1.6	3.2 ^[11]	mA
		V _{CC} =Max., f ₀ =10 MHz, Load Mode, 50% Duty Cycle, Outputs Open, Four Bits Toggling at f ₁ =5 MHz, CEP=CET=PE=GND, SR=V _{CC} , V _{IN} =3.4V or V _{IN} =GND	2.9	8.2 ^[11]	mA

Notes:

- 8. Per TTL driven input (V_{IN}=3.4V); all other inputs at V_{CC} or GND.
- 9. This parameter is not directly testable, but is derived for use in Total Power Supply calculations.
 - I_{CCD} = I_{QUIESCENT} + I_{INPUTS} + I_{DYNAMIC}
 - I_C = I_{CC} + ΔI_{CC} · D_H · N_I + I_{CCD} · (f₀/2 + f₁ · N_I)
 - I_{CC} = Quiescent Current with CMOS input levels
 - ΔI_{CC} = Power Supply Current for a TTL HIGH input (V_{IN}=3.4V)
 - D_H = Duty Cycle for TTL inputs HIGH
 - N_I = Number of TTL inputs at D_H
 - I_{CCD} = Dynamic Current caused by an input transition pair (HLH or LHL)
 - f₀ = Clock frequency for registered devices, otherwise zero
 - f₁ = Input signal frequency
 - N_I = Number of inputs changing at f₁
- 10. All currents are in milliamps and all frequencies are in megahertz.
- 11. Values for these conditions are examples of the I_{CC} formula. These limits are guaranteed but not tested.



Switching Characteristics Over the Operating Range

Parameter	Description	FCT163T				FCT163AT				Unit	Fig. No. ^[13]
		Military		Commercial		Military		Commercial			
		Min. ^[12]	Max.	Min. ^[12]	Max.	Min. ^[12]	Max.	Min. ^[12]	Max.		
t _{PLH} t _{PHL}	Propagation Delay CP to Q (PE Input HIGH)	2.0	11.5	1.5	11.0	2.0	7.5	1.5	7.2	ns	1, 5
t _{PLH} t _{PHL}	Propagation Delay CP to TC (PE Input LOW)	2.0	10.0	1.5	9.5	2.0	6.5	1.5	6.2	ns	1, 5
t _{PLH} t _{PHL}	Propagation Delay CP to TC	2.0	16.5	1.5	15.0	2.0	10.8	1.5	9.8	ns	1, 5
t _{PLH} t _{PHL}	Propagation Delay CE1 to TC	1.5	9.0	1.5	8.5	1.5	5.9	1.5	5.5	ns	1, 5
t _S	Set-Up Time, HIGH or LOW P to CP	5.5		4.0		4.5		4.0		ns	4
t _H	Hold Time, HIGH or LOW P to CP	2.0		1.5		2.0		1.5		ns	4
t _{SU}	Set-Up Time HIGH or LOW PE or SR to CP	13.5		9.5		11.5		9.5		ns	4
t _H	Hold Time HIGH or LOW PE or SR to CP	1.5		1.5		1.5		1.5		ns	4
t _{SU}	Set-Up Time HIGH or LOW CEP or CE1 to CP	13.0		9.5		11.0		9.5		ns	4
t _H	Hold Time HIGH or LOW CEP or CE1 to CP	0		0		0		0		ns	4
t _w	Clock Pulse Width (Load) HIGH or LOW	5.0		4.0		4.0		4.0		ns	5
t _w	Clock Pulse Width(Count) HIGH or LOW	8.0		6.0		7.0		6.0		ns	5

Notes:
 12. Minimum limits are guaranteed but not tested on Propagation Delays. 13. See "Parameter Measurement Information" in the General Information Section.



Switching Characteristics Over the Operating Range (continued)

Parameter	Description	FCT163CT				Unit	Fig. No. ^[13]
		Military		Commercial			
		Min. ^[12]	Max.	Min. ^[12]	Max.		
^t PLH ^t PHL	Propagation Delay CP to Q (\overline{PE} Input HIGH)	1.5	6.1	1.5	5.8	ns	1, 5
^t PLH ^t PHL	Propagation Delay CP to TC (\overline{PE} Input LOW)	1.5	5.5	1.5	5.2	ns	1, 5
^t PLH ^t PHL	Propagation Delay CP to TC	1.5	8.7	1.5	7.8	ns	1, 5
^t PLH ^t PHL	Propagation Delay CET to TC	1.5	4.8	1.5	4.4	ns	1, 5
^t S	Set-Up Time, HIGH or LOW P to CP	3.9		3.5		ns	4
^t H	Hold Time, HIGH or LOW P to CP	2.0		1.5		ns	4
^t SU	Set-Up Time, HIGH or LOW \overline{PE} or \overline{SR} to CP	9.0		7.6		ns	4
^t H	Hold Time, HIGH or LOW \overline{PE} or \overline{SR} to CP	1.5		1.0		ns	4
^t SU	Set-Up Time, HIGH or LOW CEP or CET to CP	8.8		7.6		ns	4
^t H	Hold Time, HIGH or LOW CEP or CET to CP	0		0		ns	4
^t w	Clock Pulse Width (Load) HIGH or LOW	4.0		4.0		ns	5
^t w	Clock Pulse Width (Count) HIGH or LOW	6.0		5.0		ns	5

Ordering Information

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
5.8	CY74FCT163CTPC	P1	16-Lead (300-Mil) Molded DIP	Commercial
	CY74FCT163CTQC	Q1	16-Lead (150-Mil) Quarter Size Outline	
	CY74FCT163CTSOC	S1	16-Lead (300-Mil) Molded SOIC	
6.1	CY54FCT163CTDMB	D2	16-Lead (300-Mil) CerDIP	Military
	CY54FCT163CTLMB	L61	20-Square Leadless Chip Carrier	
7.2	CY74FCT163ATPC	P1	16-Lead (300-Mil) Molded DIP	Commercial
	CY74FCT163ATQC	Q1	16-Lead (150-Mil) Quarter Size Outline	
	CY74FCT163ATSOC	S1	16-Lead (300-Mil) Molded SOIC	
7.5	CY54FCT163ATDMB	D2	16-Lead (300-Mil) CerDIP	Military
	CY54FCT163ATLMB	L61	20-Square Leadless Chip Carrier	
11.0	CY74FCT163TPC	P1	16-Lead (300-Mil) Molded DIP	Commercial
	CY74FCT163TOC	Q1	16-Lead (150-Mil) Quarter Size Outline	
	CY74FCT163TSOC	S1	16-Lead (300-Mil) Molded SOIC	
11.5	CY54FCT163TDMB	D2	16-Lead (300-Mil) CerDIP	Military
	CY54FCT163TLMB	L61	20-Square Leadless Chip Carrier	