

REFER TO PAGE 18 FOR B,E AND R PACKAGE PIN CONFIGURATIONS.

DIGITAL 8000 SERIES TTL/MSI

DESCRIPTION

The 8T10 is a high speed Quad D flip-flop with a controlled impedance output for use in bus-organized systems. The high current sink capability permits up to 20 standard loads to be interconnected on a single bus. The outputs present a high impedance to the bus when disabled (Control Input "1") and active drive when enabled (Control Inputs "0").

All four D-type flip-flops operate from a common clock with data being transferred on the low-to-high transition of the pulse.

A common clear input resets all flip-flops upon application of a logic "1" level.

Data will be stored if either one or both inputs to the Input Disable NOR gate is a logic "1".


TRUTH TABLE

D_n	IN_{DIS}	OUT_{DIS}	Q_{n+1}
0	0	0	0
1	0	0	1
X	1	0	Q_n
X	X	1	High Z

Q_n refers to the output state before a clock pulse.

Q_{n+1} refers to the output state after a clock pulse.

LOGIC DIAGRAM

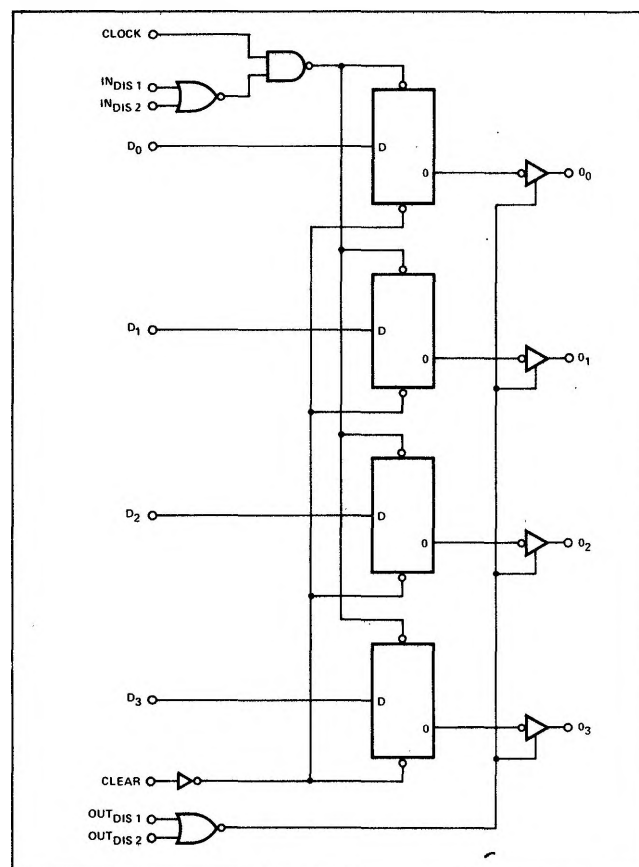

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)

CHARACTERISTICS	LIMITS				TEST CONDITIONS								NOTES
	MIN.	TYP.	MAX.	UNITS	D_n	IN DIS 1	IN DIS 2	OUT DIS 1	OUT DIS 2	CLEAR	CLOCK	OUTPUT	
"1" Output Voltage	2.4	3.0		V	2.0V	0.8V	0.8V	0.8V	0.8V	0.8V	Pulse	-5.2mA	6
"0" Output Voltage			0.4	V	0.8V	0.8V	0.8V	0.8V	0.8V	0.8V	Pulse	32mA	7
Output Leakage Current (High Impedance State)	-40		+40	μA		0.8	0.8V	+2.0V	+2.0V	0.8V	Pulse	+0.4V/ +2.4V	
"1" Input Current													
D_n Inputs			80	μA	4.5V	0.4V	0.4V	0.4V	0.4V	0.4V			
All Other Inputs			50	μA		4.5V	4.5V	4.5V	4.5V	4.5V	4.5V		
"0" Input Current													
D_n Inputs	-100		-3.2	mA	0.4V								
All Other Inputs	-100		-2.0	mA		0.4V	0.4V	0.4V	0.4V	0.4V	0.4V		
Input Latch Voltage	+5.5V				10mA	10mA	10mA	10mA	10mA	10mA	10mA		

SIGNETICS DIGITAL 8000 SERIES TTL/MSI – 8T10


$T_A = 25^\circ\text{C}$ and $V_{CC} = 5.0\text{V}$

CHARACTERISTICS	LIMITS				TEST CONDITIONS								NOTES
	MIN.	TYP.	MAX.	UNITS	D_n	IN DIS 1	IN DIS 2	OUT DIS 1	OUT DIS 2	CLEAR	CLOCK	OUTPUT	
Propagation Delay													
Clock to Output													
$C_L = 30\text{pf}$		18	25	ns									
$C_L = 300\text{pf}$		24	35	ns									
Disable to Output													
High Z to Logic 0													10
State ($C_L = 300\text{pf}$)		20	30	ns									
Logic 0 State to													11
High Z ($C_L = 300\text{pf}$)		20	30	ns									
Clear to Output													
$C_L = 30\text{pf}$		15	22	ns									
$C_L = 300\text{pf}$		21	30	ns									
Set Up Time													
Data	+5	-1		ns									
Input Disable		-6	0	ns									
Hold Time													
Data		-1	+5	ns									
Reset Pulse Width	15			ns									
Clock Frequency	35	50		MHz									
Clock Pulse Width													
Positive		8	12	ns									
Negative		8	12	ns									
Power Supply Current			118	mA	0.4V	0.4V	0.4V	4.5V	0.4V	0.4V	4.5V		8
Output Short Circuit Current	-40		-120	mA	4.5V	0.4V	0.4V	0.4V	0.4V	0.4V		0.0V	

NOTES:

- All voltage and capacitance measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
- All measurements are taken with ground pin tied to zero volts.
- Positive current flow is defined as into the terminal referenced.
- Positive logic definition: "UP" Level = "1", "DOWN" Level = "0".
- Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings
- should the isolation diodes become forward biased.
- Output source current is supplied through a resistor to ground.
- Output sink current is supplied through a resistor to V_{CC} .
- $V_{CC} = 5.25\text{V}$.
- Manufacturer reserves the right to make design and process changes and improvements.
- Measured to 1.5V level of output waveform.
- Measured to 10% level of output waveform.

TYPICAL APPLICATIONS

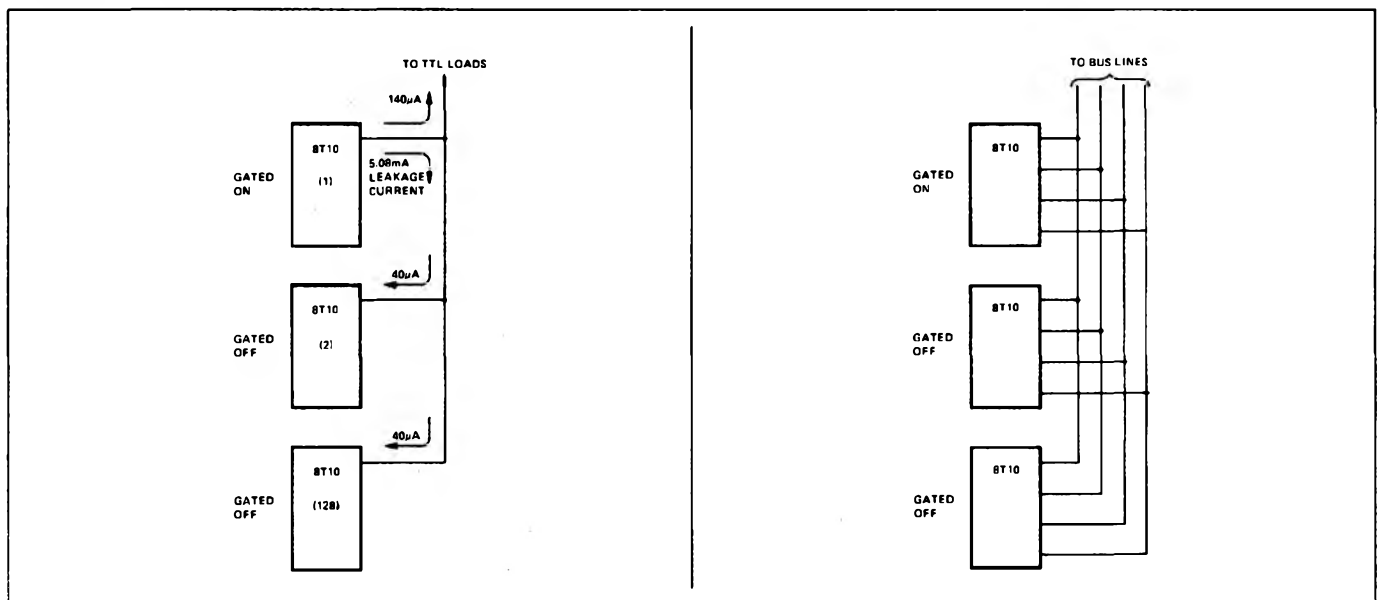

TYPICAL APPLICATIONS (Cont'd)

MULTIPLEXING EIGHT LED DISPLAYS

