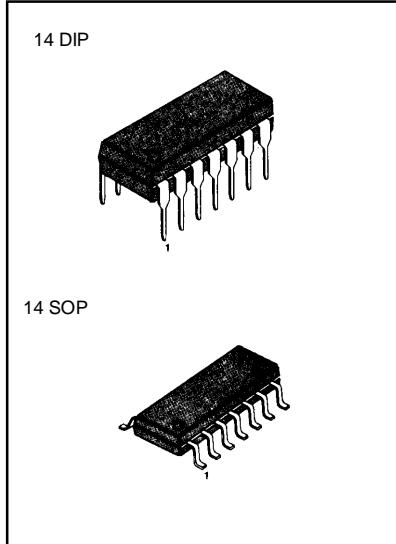
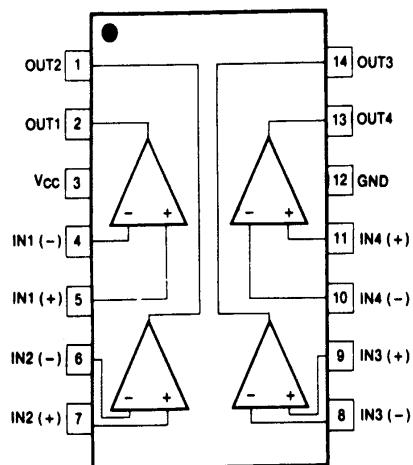


QUAD DIFFERENTIAL COMPARATOR

The KA239 series consists of four independent voltage comparators designed to operate from single power supply over a wide voltage range.


FEATURES

- Single or dual supply operation
- Wide range of supply voltage KA239/A, KA339/A: 2 ~ 36V
KA2901 (or $\pm 1 \sim \pm 18V$)
KA3302: 2 ~ 28V
(or $\pm 1 \sim \pm 1.4V$)
- Low supply current drain $800 \mu A$ Typ
- Open collector outputs for wired and connectors
- Low input bias current $25nA$ Typ
- Low Input offset current $\pm 2.3nA$ Typ.
- Low input offset voltage $\pm 1.4mV$ Typ.
- Common mode input voltage range includes ground.
- Low output saturation voltage
- Output compatible with TTL, DTL and MOS logic system

**BLOCK DIAGRAM****ORDERING INFORMATION**

Device	Package	Operating Temperature
KA339	14 DIP	0 ~ +70°C
KA339A		
KA339D	14 SOP	-25 ~ +85°C
KA339AD		
KA239	14 DIP	-40 ~ +85°C
KA239A		
KA239D	14 SOP	-40 ~ +85°C
KA239AD		
KA2901	14 DIP	-40 ~ +85°C
KA2901D	14 SOP	
KA3302	14 DIP	
KA3302D	14 SOP	

SCHEMATIC DIAGRAM

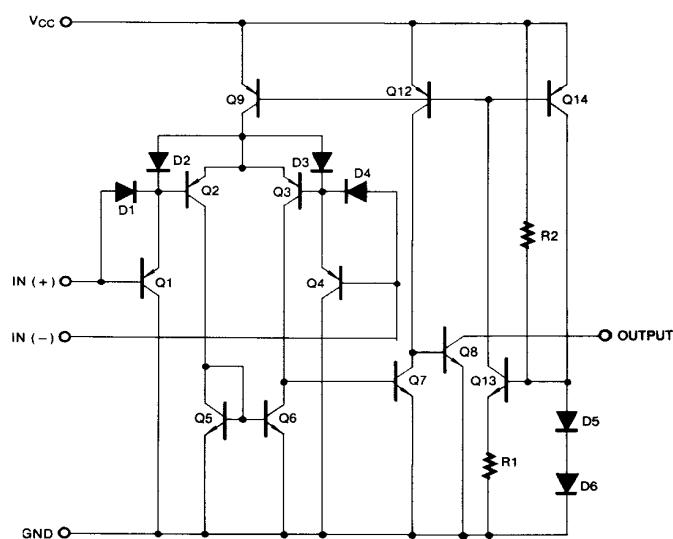

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	± 18 or 36	V
Supply Voltage Only KA3302	V_{CC}	± 14 or 28	V
Differential Input Voltage	$V_{I(DIFF)}$	36	V
Differential Input Voltage Only KA3302	$V_{I(DIFF)}$	28	V
Input Voltage	V_I	- 0.3 to +36	V
Input Voltage Only KA3302	V_I	- 0.3 to +28	V
Output Short Circuit to GND		Continuous	
Power Dissipation	P_D	570	mW
Operating Temperature KA339/KA339A KA239/KA239A KA2901/KA3302	T_{OPR}	0 ~ + 70 - 25 ~ + 85 - 40 ~ + 85	°C
Storage Temperature	T_{STG}	- 65 ~ + 150	°C

ELECTRICAL CHARACTERISTICS(V_{CC} = 5V, T_A = 25°C, unless otherwise specified)

Characteristic	Symbol	Test Conditions	KA239A/KA339A			KA239/KA339			Unit
			Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V _{IO}	V _{CM} = 0V to V _{CC} = 1.5V V _{O(P)} = 1.4V, R _S = 0Ω		± 1	± 2		± 1.4	± 5	mV
					± 4.0			± 9.0	
Input Offset Current	I _{IO}			± 2.3	± 50		± 2.3	± 50	nA
		NOTE 1			± 150			± 150	
Input Bias Current	I _{BIAS}			57	250		57	250	nA
		NOTE 1			400			400	
Input Common Mode Voltage Range	V _{I(R)}		0		V _{CC} -1.5	0		V _{CC} -1.5	V
		NOTE 1	0		V _{CC} -2	0		V _{CC} -2	
Supply Current	I _{CC}	R _L = ∞		1.1	2.0		1.1	2.0	mA
Voltage Gain	G _V	V _{CC} = 15V, R _L ≥ 15KΩ (for large swing)	50	200		50	200		V/mV
Large Signal Response Time	t _{RES}	V _I = TTL Logic Swing V _{REF} = 1.4V, V _{RL} = 5V, R _L = 5.1KΩ		350			350		ns
Response Time	t _{RES}	V _{RL} = 5V, R _L = 5.1KΩ		1.4			1.4		μs
Output Sink Current	I _{SINK}	V _{I(+)} ≥ 1V, V _{I(-)} = 0V, V _{O(P)} ≤ 1.5V	6	18		6	18		mA
Output Saturation Voltage	V _{SAT}	V _{I(+)} ≥ 1V, V _{I(-)} = 0V I _{SINK} = 4mA		140	400		140	400	mV
		NOTE 1			700			700	
Output Leakage Current	I _{O(LKG)}	V _{I(+)} = 0V V _{I(-)} = 1V		V _{O(P)} = 5V	0.1		0.1		nA
				V _{O(P)} = 30V			1.0		1.0 μA
Differential Voltage	V _{I(DIFF)}		NOTE 1			36		36	V

Note 1.

KA339/A: 0 ≤ T_A ≤ +70°CKA239/A: -25 ≤ T_A ≤ +85°CKA2901/3302: -40 ≤ T_A ≤ +85°C

ELECTRICAL CHARACTERISTICS(V_{CC} = 5V, T_A = 25°C, unless otherwise specified)

Characteristic	Symbol	Test Conditions	KA2901			KA3302			Unit
			Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V _{IO}	V _{CM} = 0V to V _{CC} = 1.5V V _{O(P)} = 1.4V, R _S = 0Ω NOTE 1	2	7	15	2	20	40	mV
Input Offset Current	I _{IO}	NOTE 1	2.3	50	200	3	100	300	nA
Input Bias Current	I _{BIAS}	NOTE 1	57	250	500	57	250	1000	nA
Input Common Mode Voltage Range	V _{I(R)}	NOTE 1	0	V _{CC} -1.5	0	V _{CC} -1.5	V _{CC} -2	V _{CC} -2	V
Supply Current	I _{CC}	R _L = ∞ R _L = ∞, V _{CC} = 30V	0	V _{CC} -2	0	V _{CC} -2	1.1	2.0	mA
Voltage Gain	G _V	V _{CC} = 15V, R _L ≥ 15KΩ (for large swing)	25	100	2	30			V/mV
Large Signal Response Time	t _{RES}	V _I = TTL Logic Swing V _{REF} = 1.4V, V _{RL} = 5V, R _L = 5.1KΩ	350		350				ns
Response Time	t _{RES}	V _{RL} = 5V, R _L = 5.1KΩ		1.4		1.4			μs
Output Sink Current	I _{SINK}	V _{I(-)} ≥ 1V, V _{I(+)} = 0V, V _{O(P)} ≤ 1.5V	6	18	6	18			mA
Output Saturation Voltage	V _{SAT}	V _{I(-)} ≥ 1V, V _{I(+)} = 0V I _{SINK} = 4mA	NOTE 1	140	400	140	400	700	mV
Output Leakage Current	I _{O(LKG)}	V _{I(-)} = 0V V _{I(+)} = 1V	V _{O(P)} = 5V V _{O(P)} = 30V	0.1		0.1		1.0	nA
Differential Voltage	V _{I(DIFF)}	NOTE 1			36		36		V

Note 1.

KA339/A: 0 ≤ T_A ≤ +70°CKA239/A: -25 ≤ T_A ≤ +85°CKA2901/3302: -40 ≤ T_A ≤ +85°C

KA239/A, KA339/A, KA2901, KA3302

QUAD COMPARATOR

TYPICAL PERFORMANCE CHARACTERISTICS

Fig. 1 SUPPLY CURRENT

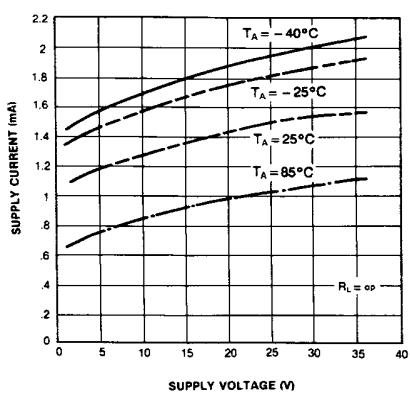


Fig. 2 INPUT CURRENT

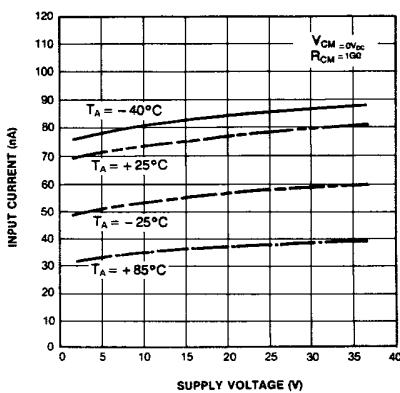


Fig. 3 OUTPUT SATURATION VOLTAGE

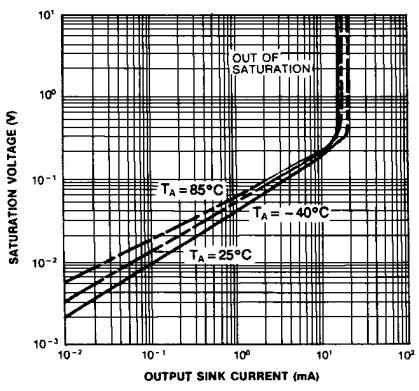


Fig. 4 RESPONSE TIME FOR VARIOUS INPUT OVERDRIVE-NEGATIVE TRANSITION



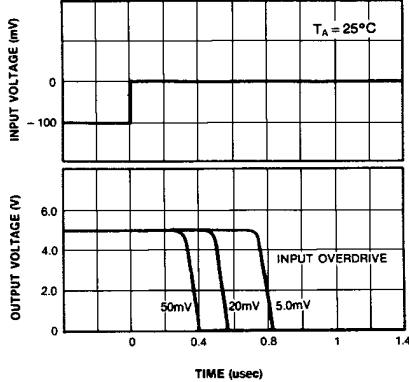


Fig. 5 RESPONSE TIME FOR VARIOUS INPUT OVERDRIVE-POSITIVE TRANSITION

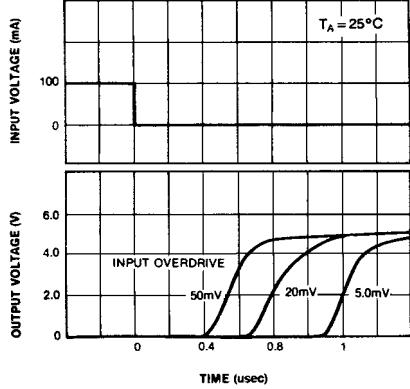


14-DIP-300

Dimensions in Millimeters/inches

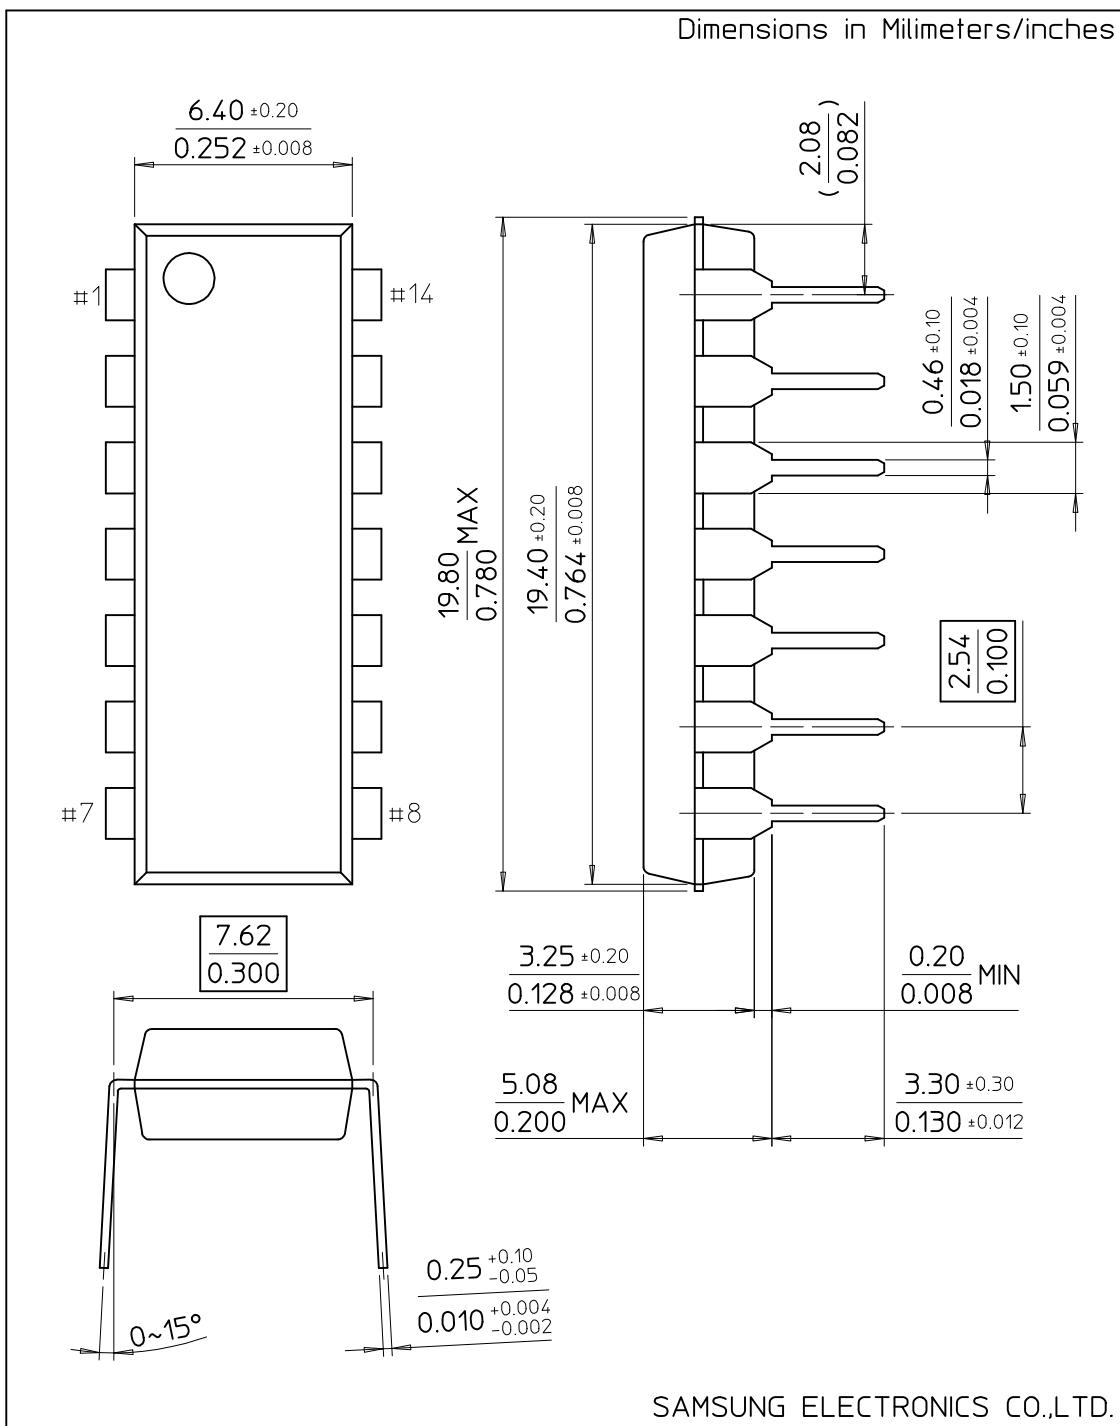

SAMSUNG ELECTRONICS CO.,LTD.

14-SOP-225B

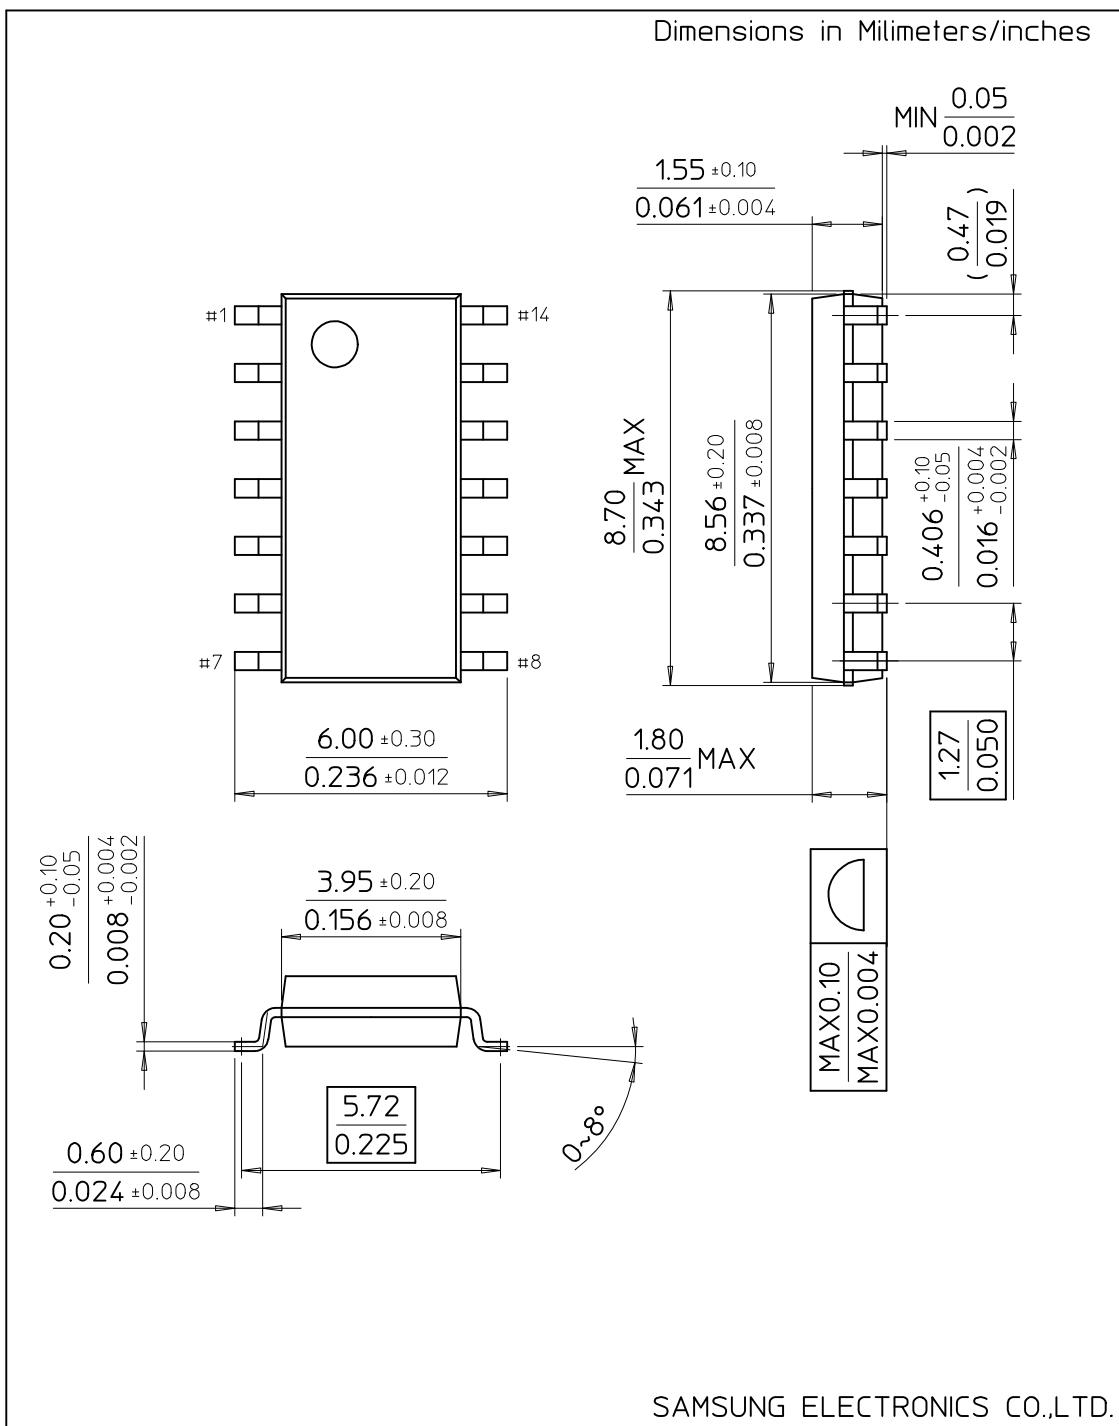

SAMSUNG ELECTRONICS CO.,LTD.