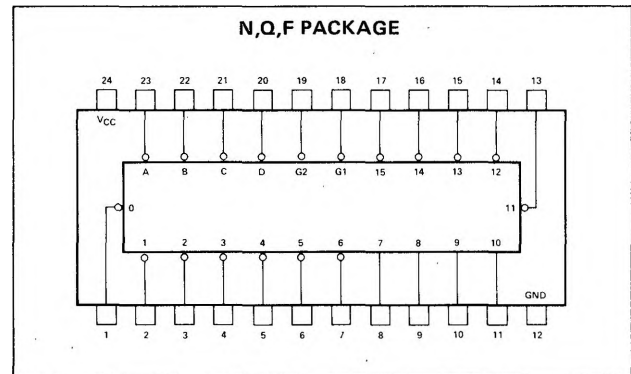


S54154
N74154

DIGITAL 54/74 TTL SERIES

PIN CONFIGURATIONS

N,Q,F PACKAGE

[illegible]

SIGNETICS DIGITAL 54/74 TTL SERIES – S54154 • N74154
RECOMMENDED OPERATING CONDITIONS

	S54154			N74154			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
Supply Voltage V_{CC}	4.5	5	5.5	4.75	5	5.25	V
Normalized Fan-Out from each Output, N: Low logic level			10			10	
High logic level			20			20	
Operating Free-Air Temperature Range	-55	25	125	0	25	70	°C

ELECTRICAL CHARACTERISTICS (over recommended operating free-air temperature range unless otherwise noted)

PARAMETER		TEST CONDITIONS*	MIN	TYP**	MAX	UNIT
V_{IH}	High-level input voltage		2			V
V_{IL}	Low-level input voltage				0.8	V
V_{OH}	High-level output voltage	$V_{CC} = \text{MIN}, V_{IH} = 2V,$ $V_{IL} = 0.8V, I_{OH} = -800 \mu A$	2.4			V
V_{OL}	Low-level output voltage	$V_{CC} = \text{MIN}, V_{IH} = 2V,$ $V_{IL} = 0.8V, I_{OL} = 16mA$			0.4	V
I_{IH}	High-level input current	$V_{CC} = \text{MAX}, V_I = 2.4V$			40	A
(each input)		$V_{CC} = \text{MAX}, V_I = 5.5V$			1	mA
I_{IL}	Low-level input current	$V_{CC} = \text{MAX}, V_I = 0.4V$			-1.6	mA
(each input)						
I_{OS}	Short-circuit output current†	$V_{CC} = \text{MAX}$	-20		-55	mA
		S54154	-18		-57	
		N74154				
I_{CC}	Supply current	$V_{CC} = \text{MAX}$		34	49	mA
		S54154		34	56	
		N74154				

SWITCHING CHARACTERISTICS, $V_{CC} = 5V, T_A = 25^\circ C, N = 10$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time, low-to-high-level output, from A, B, C, or D inputs through 3 levels of logic			24	36	ns
t_{PHL}	Propagation delay time, high-to-low-level output, from A, B, C, or D inputs through 3 levels of logic	$C_L = 15pF, R_L = 400\Omega$		22	33	ns
t_{PLH}	Propagation delay time, low-to-high-level output, from either strobe input			20	30	ns
t_{PHL}	Propagation delay time, high-to-low-level output, from either strobe input			18	27	ns

* For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable circuit type.

** All typical values are at $V_{CC} = 5V, T_A = 25^\circ C$.

† Not more than one output should be shorted at a time.